

OSTROLENK, FABER, GERB & SOFFEN, LLP

Attorneys at Law

1180 Avenue of the Americas
New York, New York 10036-8403

(212) 382-0700

Telex
23 6925

Facsimile
(212) 382-0888

Cable
Ostrofaber NewYork

Express Mail #EL334614598

Asst. Commissioner for Patents
Washington, DC 20231

OFGS File No. : P/1071-1075
Inventor : Yasuhiro TANAKA
Title : NONRECIPROCAL CIRCUIT DEVICE AND METHOD
OF FABRICATING THE SAME
Assignee : Murata Manufacturing Co., Ltd.

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

- 22 Pages of Specification including Abstract and Claims
- 19 Numbered Claims Calculated as 19 Claims for Fee Purposes
- 8 Sheets of Drawing Containing Figures 1A to 8. (Informal)
- X Declaration and Power of Attorney (UNSIGNED)
- X Priority is Claimed under 35 U.S.C. §119:
- Convention Date June 29, 1999 for Japan Appln. S.N. 11-181906
- Certified Priority Application
- Verified Statement Claiming Small Entity Status under 37 C.F.R. §1.27.
- Assignment
- X Preliminary Amendment
- X Return-Addressed Post Card

OFGS Check No. 9555, including the fee of \$690.00, calculated as follows:

Basic Filing Fee:	\$ 690.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times \$18:	0
Number of Independent Claims in Excess of 3, times \$78:	0
One or More Multiple Dependent Claims: Total \$260.	0
Total Filing Fees or	690.00
Total Filing Fee Reduced 50% for Small Entity:	0
Assignment Recording Fee: \$40	0
TOTAL Filing Fee and Assignment Recording Fee:	<u>\$ 690.00</u>

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL334614598US) in an envelope addressed to: Asst. Commissioner for Patents, Washington, D.C. 20231, on June 27, 2000

YVETTE CARR

Name of Person Mailing Correspondence

Signature

June 27, 2000

Date of Signature

Respectfully submitted,

James A. Finder
Registration No.: 30,173
OSTROLENK, FABER, GERB & SOFFEN, LLP
1180 Avenue of the Americas
New York, New York 10036-8403
Telephone: (212) 382-0700

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

New York, New York

Yasuhiro TANAKA

Date: June 27, 2000

Serial No.:

Group Art Unit:

Filed:

Examiner:

For: NONRECIPROCAL CIRCUIT DEVICE AND METHOD
OF FABRICATING THE SAME

Asst. Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Preliminary to examination, please amend the above-identified patent application
as follows:

IN THE CLAIMS:

Please amend the claims as follows:

Claim 1, line 5, change "the" to --an--;

line 6, change "the" (first occurrence) to --a--;

line 7, change "the center" to --a central area of the laminated
body--.

Claim 2, line 2, after "on" insert --a side of--;

line 3, after "to" insert --the side on which--;

line 4, change "substrate," to --substrate is laminated,--.

Claim 3, line 1, delete "one of";
line 2, change "Claims 1 and" to --Claim--.

Claim 4, line 1, delete "any one";
line 2, change "of Claims 1 to" to --Claim--.

5. (Amended) A method of fabricating a nonreciprocal circuit device [according to Claim 1], comprising the steps of:

preparing a mother magnetic substrate and a mother permanent-magnet substrate;
forming an electrode for forming a [the] network [on at least one surface of at least one of the mother permanent-magnet substrate and the mother magnetic substrate];

laminating the mother magnetic substrate, the mother permanent-magnet substrate, the electrode, a plurality of central conductors, and a yoke, [by an adhesive] to obtain a mother laminated body;

cutting the mother laminated body in a [the] thickness direction thereof, to obtain laminated bodies corresponding respectively to a plurality of [the] individual nonreciprocal circuit devices [; and integrating the yoke into the laminated body].

Please add new claims 6-19 as follows:

--6. The method of claim 5, further comprising the step of integrating the yoke into the laminated body.

7. The method of claim 5, wherein said laminating step employs an adhesive.

8. The method of claim 5, further comprising the step of laminating a mother dielectric substrate on a side of the mother magnetic substrate opposite to the side on which the mother permanent-magnet substrate is laminated.

9. The method of claim 8, wherein said electrode for forming a network is formed on at least one surface of at least one of the mother permanent-magnet substrate, the mother magnetic substrate, and the mother dielectric substrate.

10. The method of claim 5, wherein said electrode for forming a network is formed on at least one surface of at least one of the mother permanent-magnet network and the mother magnetic substrate.

11. A nonreciprocal circuit device according to Claim 10, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.

12. A nonreciprocal circuit device according to Claim 9, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.

13. A nonreciprocal circuit device according to Claim 8, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.

14. A nonreciprocal circuit device according to Claim 6, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.

15. A nonreciprocal circuit device according to Claim 5, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.

16. A nonreciprocal circuit device according to claim 1, wherein the network includes a capacitor electrode electrically connected to one end of any one of the central conductors and a ground electrode formed on the lower surface of the laminated body, and the capacitor electrode and the ground electrode constitute a capacitor.

17. A nonreciprocal circuit device according to Claim 16, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.

18. A nonreciprocal circuit device according to Claim 2, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.

19. A nonreciprocal circuit device according to Claim 1, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.--.

REMARKS

The claims are being amended to place this application in better form for U.S. practice.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL334614598) in an envelope addressed to: Asst. Commissioner of Patents and Trademarks, Washington, D.C. 20231, on June 27, 2000

YVETTE CARR


Name of Person Mailing Correspondence

Signature

June 27, 2000

Date of Signature

Respectfully submitted,



James A. Finder

Registration No.: 30,173

OSTROLENK, FABER, GERB & SOFFEN, LLP

1180 Avenue of the Americas

New York, New York 10036-8403

Telephone: (212) 382-0700

JAF:rb

NONRECIPROCAL CIRCUIT DEVICE AND METHOD OF FABRICATING THE
SAME

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to nonreciprocal circuit devices, such as isolators and circulators, and to a method of fabricating the same. More particularly, the invention relates to a nonreciprocal circuit device in which a plurality of components are integrated and a method of fabricating the same.

2. Description of the Related Art

Various types of isolators and circulators have been disclosed as high-frequency nonreciprocal circuit devices. An example of a conventional isolator will be described with reference to FIGs. 7 and 8.

In the fabrication process of an isolator, a plurality of central conductors 52 to 54 are placed on the upper surface of a ferrite substrate 51. The central conductors 52 to 54 intersect each other in the center while being electrically insulated from each other.

The integrated structure in which the central conductors 52 to 54 intersect each other is referred to as "a net". A permanent-magnet plate 55 is deposited on the ferrite substrate 51 with the net therebetween. Capacitors

004290" 68250560

56a to 56c and a resistor 57 are also mounted so as to be electrically connected to the central conductors 52 to 54. The capacitors 56a to 56c and the resistor 57 may be disposed in various manners. After the components shown in FIG. 7 are assembled, the integrated unit is contained in a base 58 shown in FIG. 8. A magnetic cap 59 coated with a conductive film is placed on the base 58. A yoke 60 composed of a metal plate or the like is also mounted so as to be magnetically coupled to the cap 59.

Consequently, various attempts have been made to integrate a plurality of components constituting a nonreciprocal circuit device.

for receiving a magnetic yoke.

Japanese Unexamined Patent Application Publication No. 8-330812 discloses a method of fabricating a lumped-constant circulator, in which ferrimagnetic thin plates provided with central conductors printed thereon are laminated, and the resulting laminate is cut off, followed by firing. That is, the individual laminates, each corresponding to a lumped-constant circulator unit, are separated from a mother laminate, and by firing the laminates, structures in which central conductors and magnetic members are integrated are obtained.

Japanese Unexamined Patent Application Publication No. 9-326606 discloses a nonreciprocal circuit device in which a central conductor and capacitor electrodes constituting a capacitor are disposed within a sintered compact composed of a magnetic material.

As described above, various types of structure, in which a plurality of components of a nonreciprocal circuit device are integrated using an integrating firing technique or the like, have been disclosed. However, with respect to the conventional nonreciprocal circuit devices, although an attempt is made to integrate a plurality of components, preparation and assembly of many components are still required.

For example, in Japanese Unexamined Patent Application

004290 68450960

Publication No. 8-222912, although the magnetic member, the central conductor, and the permanent magnet are integrated using the integrating firing technique, the magnetic yoke must be separately prepared and be mounted on the laminate obtained using the integrating firing technique.

With respect to the lumped-constant circulator disclosed in Japanese Unexamined Patent Application Publication No. 8-330812, only the ferrimagnetic thin plates and the central conductors are integrated. That is, a permanent magnet, a magnetic yoke, etc., must be prepared as separate components, which must be assembled together with the sintered compact.

With respect to the nonreciprocal circuit device disclosed in Japanese Unexamined Patent Application Publication No. 9-326606, although the central conductor and the electrodes constituting the capacitor to be connected to the central conductor are integrally fired with the magnetic body, other components, such as a permanent magnet and a magnetic yoke, must be prepared separately and be mounted on the sintered compact.

SUMMARY OF THE INVENTION

Accordingly, the present invention resolve the several drawbacks as described above, and it is an object of the present invention to provide a nonreciprocal circuit device

002290" 62750950

in which more components, including a network provided with elements such as a capacitor, can be integrated, thus efficiently improving productivity and reliability, and to provide a method of fabricating the same.

In accordance with the present invention, a nonreciprocal circuit device includes a laminated body including a magnetic substrate composed of a ferromagnetic material, a permanent-magnet substrate laminated on the magnetic substrate, a plurality of central conductors disposed on the upper surface or the lower surface of the magnetic substrate, the central conductors intersecting each other in the center while being electrically insulated from each other, and a yoke integrated into the laminated body, and a network provided within the laminated body and electrically connected to any one of the plurality of central conductors.

Preferably, the nonreciprocal circuit device further includes a dielectric substrate laminated on the magnetic substrate opposite to the permanent-magnet substrate, and the network is disposed on at least one surface of at least one of the magnetic substrate, the permanent-magnet substrate, and the dielectric substrate, and is electrically connected to any one of the central conductors.

Preferably, in the nonreciprocal circuit device, the network includes a capacitor electrode electrically

002290"062700

connected to one end of any one of the central conductors, and a ground electrode provided on the lower surface of the laminated body. The capacitor electrode and the ground electrode constitute a capacitor.

Preferably, the yoke is constructed by a magnetic film covering the outer surface of the laminated body. Further, according to another aspect of the invention, the nonreciprocal circuit device includes a second magnetic substrate laminated on the lower surface of the laminated body, and a magnetic case coupled to the second magnetic substrate; the magnetic case covers the upper surface, the lower surface and side surfaces of the laminated body.

In accordance with the present invention, a method of fabricating the nonreciprocal circuit device includes the steps of preparing a mother magnetic substrate and a mother permanent-magnet substrate; forming an electrode for forming the network on at least one surface of at least one of the mother permanent-magnet substrate and the mother magnetic substrate; laminating the mother magnetic substrate, the mother permanent-magnet substrate, and a plurality of central conductors by an adhesive to obtain a mother laminated body; cutting the mother laminated body in the thickness direction to obtain laminated bodies corresponding to the individual nonreciprocal circuit devices; and integrating the yoke into each laminated body.

002290" 062700 09605789 09605789

BRIEF DESCRIPTION OF THE DRAWINGS

FIGs. 1A and 1B are diagrams showing major portions of a nonreciprocal circuit device in an embodiment of the present invention, FIG. 1A is a schematic perspective view showing an electrode structure formed within a laminated body, and FIG. 1B is a perspective view showing the appearance of the laminated body;

FIG. 2 is a circuit diagram showing the circuit configuration provided on the laminated body in the embodiment of the present invention;

FIGs. 3A to 3D are perspective views showing the individual steps of forming the electrode structure on a dielectric substrate in the embodiment of the present invention;

FIG. 4 is a perspective view of the nonreciprocal circuit device in the embodiment of the present invention;

FIGs. 5A to 5D are perspective views illustrating a method of forming a magnetic yoke in the present invention, FIG. 5A shows a laminated body, FIG. 5B shows a magnetic case, FIG. 5C shows a nonreciprocal circuit device, and FIG. 5D shows a second magnetic substrate;

FIGs. 6A and 6B are perspective views showing a mother laminated body prepared and a laminated body obtained by cutting the mother laminated body, respectively, in

accordance with a method of fabricating the nonreciprocal circuit device in the embodiment;

FIG. 7 is an assembly view showing an example of a method of fabricating a conventional nonreciprocal circuit device; and

FIG. 8 is an assembly view showing the example of the method of fabricating the conventional nonreciprocal circuit device.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Nonreciprocal circuit devices and methods of fabricating the same will be described with reference to the drawings.

FIG. 1A is a schematic perspective view showing a major portion of a nonreciprocal circuit device in an embodiment of the present invention, and FIG. 1B is a perspective view showing the appearance of a laminated body excluding a magnetic yoke.

The nonreciprocal circuit device in this embodiment is used as an isolator and includes a laminated body 1 shown in FIGS. 1A and 1B.

The laminated body 1 includes a dielectric substrate 2, a ferrite substrate 3 as a magnetic substrate, and a permanent-magnet substrate 4. A plurality of central conductors 5 to 7 are disposed on the upper surface of the

dielectric substrate 2 so as to be electrically insulated from each other and to intersect each other in the center. Capacitor electrodes C1 to C3 are formed on the upper surface of the dielectric substrate 2 so as to be electrically connected to the central conductors 5 to 7. An inductor L and a resistor R are formed on the upper surface of the dielectric substrate 2. A method of fabricating the electrode structure to be formed on the upper surface of the dielectric substrate 2 will be described.

As shown in FIG. 3A, first, the dielectric substrate 2 is prepared.

As shown in FIG. 3B, the capacitor electrodes C1 to C3, connecting electrodes 9a to 9c, and the inductor L are formed on an upper surface 2a of the dielectric substrate 2, using a conductive material.

As shown in FIG. 3C, a back-surface electrode 10 is formed over substantially the entire portion of a lower surface 2b of the dielectric substrate 2. The back-surface electrode 10 and the capacitor electrodes C1 to C3 are opposed to each other with the dielectric substrate 2 therebetween. In this way, a capacitor is constructed between each of the capacitor electrodes C1 to C3 and the back-surface electrode 10.

Additionally, methods for fabricating the connecting electrodes 9a to 9c, the capacitor electrodes C1 to C3, the

inductor L, and the back-surface electrode 10 are not specifically limited, and photolithography, screen-printing of a conductive paste, and the like may be employed.

Next, a resistive paste is applied so as to be electrically connected to the capacitor electrode C3 and the connecting electrode 9a, followed by baking to form the resistor R. A connecting electrode 8 is further formed on the side of the dielectric substrate 2. The connecting electrode 9a and the back-surface electrode 10 are electrically connected to each other by the connecting electrode 8.

As shown in FIG. 3D, the central conductors 5 to 7 are then laminated on the dielectric substrate 2. In order to electrically insulate the central conductors 5 to 7 from each other, an insulator 12 is interposed between the central conductors 5 to 7 at the intersection of the central conductors 5 to 7 in the center. As the insulator 12, a ceramic, glass, a metal, an oxide, an insulating resin sheet, or an insulating adhesive may be used.

The dielectric substrate 2 shown in FIG. 1 is thus obtained. The ferrite substrate 3 is laminated on the upper surface of the dielectric substrate 2 and is integrated, by an insulating adhesive. The permanent-magnet substrate 4 is further laminated on the upper surface of the ferrite substrate 3 and is integrated, by an insulating adhesive.

Accordingly, in the laminated body 1, the circuit configuration shown in FIG. 2 is constructed. That is, the networks including the capacitors C1 to C3, and the resistor R, or the inductor L are electrically connected to the central conductors 5 to 7 constituting the nonreciprocal circuit device.

In the nonreciprocal circuit device in this embodiment, the central conductors, the permanent magnet, the magnetic member, and the networks electrically connected to the central conductors are integrated in the laminated body 1.

As shown in FIG. 1B, a common electrode 13, an input electrode (not shown in the drawing), and an output electrode 14 are formed on the outer sides of the laminated body 1. The common electrode 13 is electrically connected to the central conductors 5 to 7, and is connected to the ground potential. The output electrode 14 is electrically connected to an end of the central conductor 6 opposite to the other end thereof electrically connected to the common electrode 13. The input electrode is formed on a side surface of the laminated body 1 opposite to the side surface in which the output electrode 14 is formed, and is electrically connected to the end of the central conductor 5 via the inductor L and the connecting electrode 9b.

Next, as shown in FIG. 4, a magnetic yoke 16 is constructed by forming a conductive film over the outer

surface of the laminated body 1, excluding the input electrode and the output electrode 14, so as not to be electrically connected to the input electrode and the output electrode 14. The method of forming the conductive film constituting the magnetic yoke 16 is not specifically limited, and a thin film deposition method, such as plating, vapor deposition, or sputtering, coating of a conductive paste, or the like may be employed.

Consequently, in a nonreciprocal circuit device 17 shown in FIG. 4, many components constituting the nonreciprocal circuit device are integrated into a single component. That is, the dielectric substrate 2, the ferrite substrate 3, the permanent-magnet substrate 4, the central conductors 5 to 7, as well as the capacitors C1 to C3, the resistor R, and the inductor L constituting the networks, and the magnetic yoke 16 are integrated.

Moreover, when the nonreciprocal circuit device 17 is fabricated, after the laminated body 1 is obtained, only by forming the conductive film, the magnetic yoke 16 is integrated, and thus complex operations, such as physical assembly of a plurality of components, either manually or mechanically, can be omitted, resulting in an improvement in productivity and reliability of the nonreciprocal circuit device.

The magnetic yoke may be formed by a different method.

002290" 68250960

An example of such a method will be described with reference to FIGs. 5A to 5C.

As shown in FIG. 5A, connecting electrodes 21 and 22 are formed on the outer surface of the laminated body 1. The connecting electrodes 21 and 22 act in a manner similar to that of the connecting electrode 8 shown in FIG. 3. That is, the connecting electrodes 21 and 22 merely electrically connects a plurality of electrodes to be connected to the ground potential.

Next, a magnetic case 23 shown in FIG. 5B is placed on the laminated body 1. The magnetic case 23 is composed of a magnetic material, and the outer surface thereof is coated with a conductive film. The magnetic case 23 is provided with an opening 23a which is open downward and cut-outs 23b and 23c for electrically disconnecting from the input and output electrodes.

While the magnetic case 23 is placed on the laminated body 1, the magnetic case 23 and the connecting electrodes 21 and 22 are electrically connected each other by soldering or the like. In this way, a magnetic yoke can be constructed by the magnetic case 23. That is, the magnetic yoke can be integrated into the laminated body 1. FIG. 5C shows an isolator 24 thus obtained.

Although the magnetic yoke is constructed by the magnetic case 23 in the example described above, a second

the mother laminated body 31 in the thickness direction along dotted-chain lines A and B, laminated bodies may be obtained. In this way, a laminated body 1A shown in FIG. 6B is obtained. Since the laminated body 1A is obtained by cutting the mother laminated body 31, connecting electrodes are still not formed on the sides thereof. Consequently, after the laminated body 1A is obtained, by forming connecting electrodes by a thin film deposition method, such as vapor deposition, plating, or sputtering, coating of a conductive paste, or the like, the laminated body 1 shown in FIG. 1 can be obtained.

Although the dielectric substrate 2 is used in the embodiment, it is not always necessary to use the dielectric substrate 2 in the present invention. That is, the electrode structure formed on the upper surface of the dielectric substrate 2 in the previous embodiment may be disposed on the upper surface of the ferrite substrate 3 instead of the dielectric substrate, and thus the dielectric substrate 2 may not be used. In such a case, in a laminated body in which the ferrite substrate 3 and the permanent-magnet substrate 4 are laminated, a plurality of central conductors, the magnetic substrate, the permanent-magnet substrate, and the individual electrodes constituting the networks are integrated.

The magnetic material for constituting the magnetic

yoke is not specifically limited, and Fe, Co, Ni, Mn, Cr, or alloys thereof may be used. When the magnetic member constituting the magnetic shield is electrically conductive, the magnetic member acts as an electrical shield in addition to acting as the magnetic shield.

However, since the magnetic materials described above do not always have superior electrical conductivity, preferably, the surface of the magnetic member is further coated with a metal having superior electrical conductivity, such as Ag, Cu, Au, or Al.

As described above, in accordance with the present invention, a nonreciprocal circuit device of the present invention includes a laminated body including a magnetic substrate composed of a ferromagnetic material, a permanent-magnet substrate laminated on the magnetic substrate, a plurality of central conductors disposed on the upper surface or the lower surface of the magnetic substrate, the central conductors intersecting each other in the center while being electrically insulated from each other, and a yoke integrated into the laminated body, and a network formed within the laminated body and electrically connected to any one of the plurality of central conductors. Thus, all the components are integrated. Accordingly, while complex operations, such as physically assembling a plurality of components manually, mechanically, or the like,

007290" 062700

When the network includes a capacitor electrode electrically connected to one end of any one of the central conductors, and a ground electrode formed on the lower surface of the laminated body, and the capacitor electrode and the ground electrode constitute a capacitor, since the capacitor is constructed by the laminated body, a capacitor as a separate component can be omitted.

When the yoke is composed of a magnetic film covering the outer surface of the laminated body, since the yoke is formed only by constructing the magnetic film on the surface of the laminated body, the complex assembly process can be omitted when the yoke is fabricated.

In accordance with a method of fabricating the nonreciprocal circuit device of the present invention, a mother magnetic substrate and a mother permanent-magnet substrate are prepared, an electrode for forming the network is formed on at least one surface of at least one of the mother permanent-magnet substrate and the mother magnetic substrate, and the mother magnetic substrate and the mother permanent-magnet substrate are laminated using an adhesive so that the plurality of central conductors are placed on the upper surface or the lower surface of the magnetic substrate, and thus a mother laminated body is obtained. By cutting the mother laminated body in the thickness direction, laminated bodies corresponding to the individual nonreciprocal circuit devices can be obtained. By integrating the yoke into each laminated body, the nonreciprocal circuit device of the present invention can be obtained efficiently.

That is, since the process up to the step of obtaining the laminated body can be performed in the state of the mother substrate, the productivity of the nonreciprocal

002290 68250950

circuit device can be further improved.

[illegible]

WHAT IS CLAIMED IS:

1. A nonreciprocal circuit device comprising:

a laminated body comprising a magnetic substrate made of a ferromagnetic material, a permanent-magnet substrate laminated on the magnetic substrate, and a plurality of central conductors disposed on one of the upper surface and the lower surface of the magnetic substrate, the plurality of central conductors intersecting each other in the center while being electrically insulated from each other;

a yoke integrated into the laminated body; and

a network provided within the laminated body and electrically connected to any one of the plurality of central conductors.

2. A nonreciprocal circuit device according to Claim 1, further comprising a dielectric substrate laminated on the magnetic substrate opposite to the permanent-magnet substrate, wherein the network is disposed on at least one surface of at least one of the magnetic substrate, the permanent-magnet substrate, and the dielectric substrate, and is electrically connected to any one of the central conductors.

3. A nonreciprocal circuit device according to one of

002290" 68750350

Claims 1 and 2, wherein the network includes a capacitor electrode electrically connected to one end of any one of the central conductors and a ground electrode formed on the lower surface of the laminated body, and the capacitor electrode and the ground electrode constitute a capacitor.

4. A nonreciprocal circuit device according to any one of Claims 1 to 3, wherein the yoke comprises a magnetic film covering the outer surface of the laminated body.

5. A method of fabricating a nonreciprocal circuit device according to Claim 1, comprising the steps of:

preparing a mother magnetic substrate and a mother permanent-magnet substrate;

forming an electrode for forming the network on at least one surface of at least one of the mother permanent-magnet substrate and the mother magnetic substrate;

laminating the mother magnetic substrate, the mother permanent-magnet substrate, a plurality of central conductors, and a yoke, by an adhesive to obtain a mother laminated body;

cutting the mother laminated body in the thickness direction to obtain laminated bodies corresponding to the individual nonreciprocal circuit devices; and

integrating the yoke into the laminated body.

004239" 68250950

ABSTRACT OF THE DISCLOSURE

A nonreciprocal circuit device includes a laminate including a magnetic substrate composed of a ferromagnetic material, a permanent-magnet substrate laminated on the magnetic substrate, and a plurality of central conductors disposed on one of the upper surface and the lower surface of the magnetic substrate, a yoke integrated into the laminate, and a network formed within the laminate and electrically connected to any one of the plurality of central conductors.

007290" 68750960

【書類名】 図面

【図1】

FIG. 1A



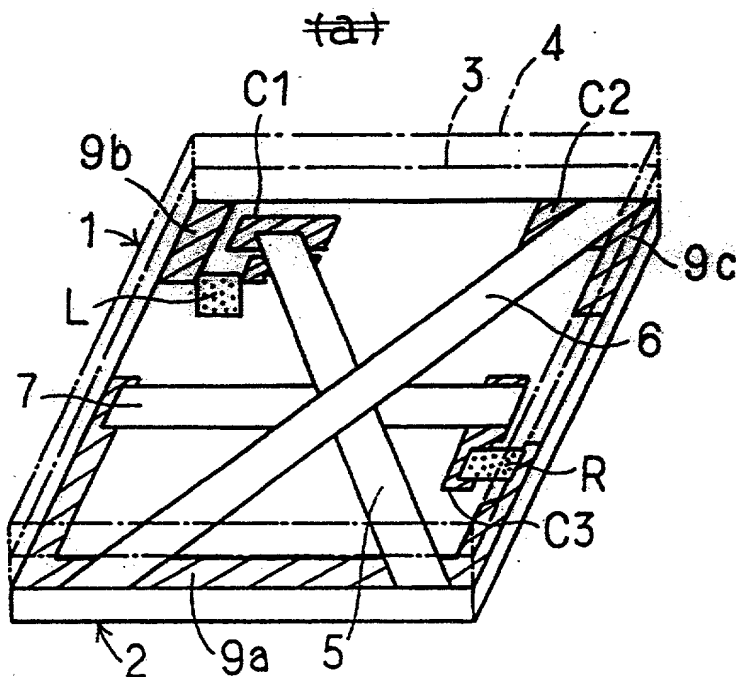


FIG. 1B

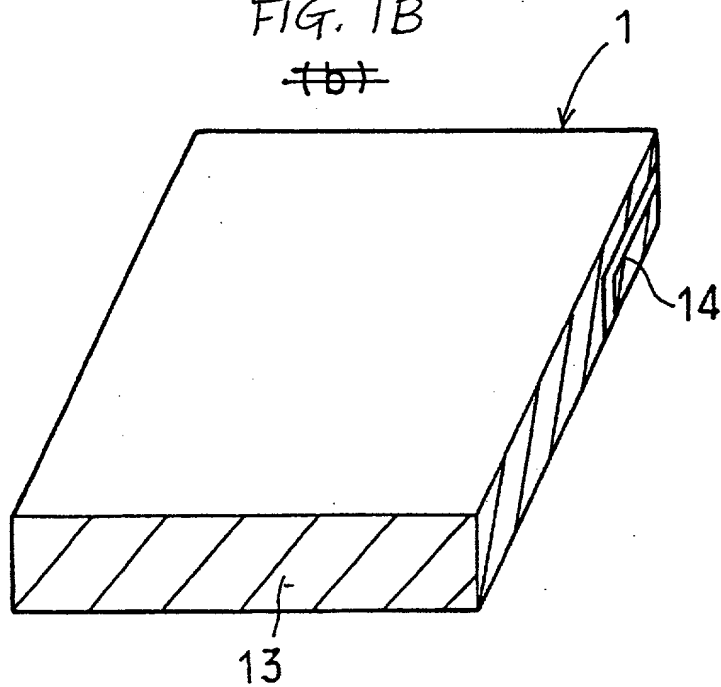

002290 68250960

~~FIG. 2~~ FIG. 2

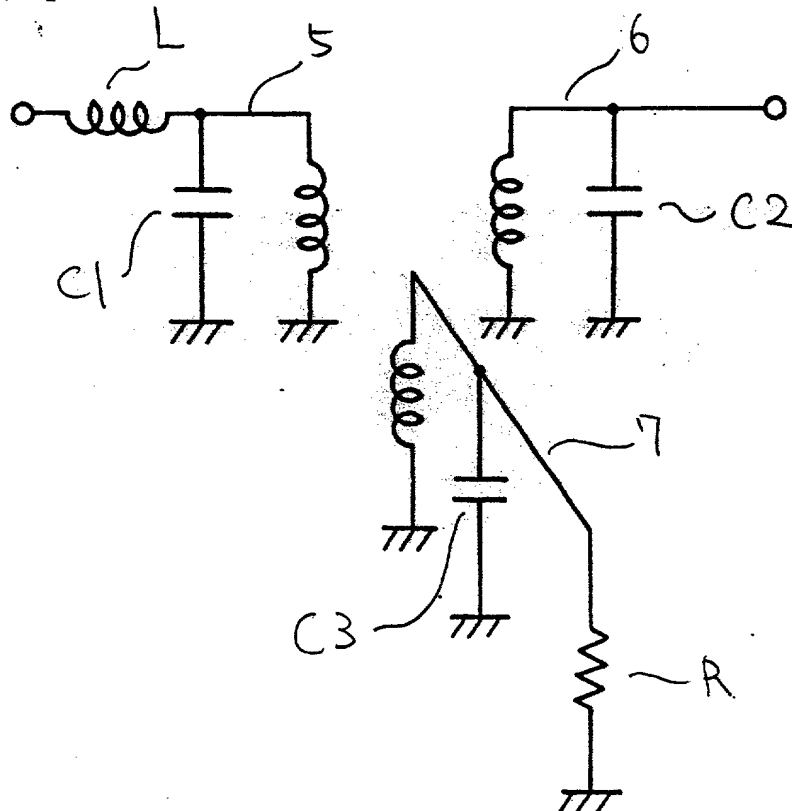

【図3】

FIG. 3A (a)

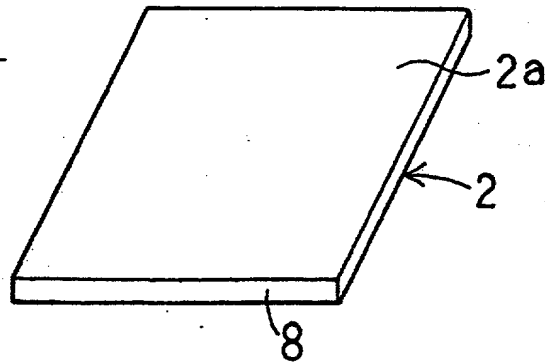


FIG. 3B (b)

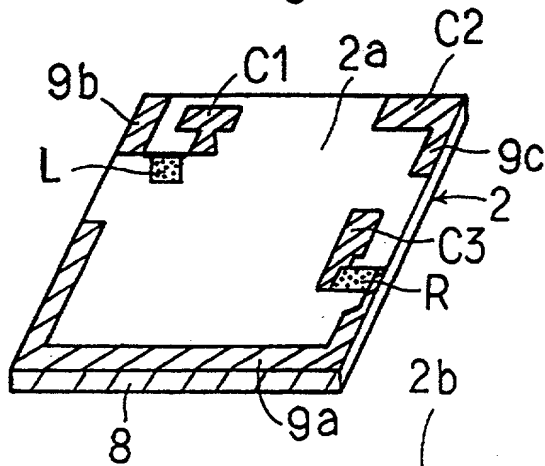


FIG. 3C (c)



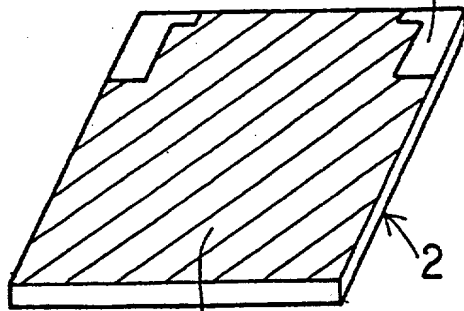


FIG. 3D (d)

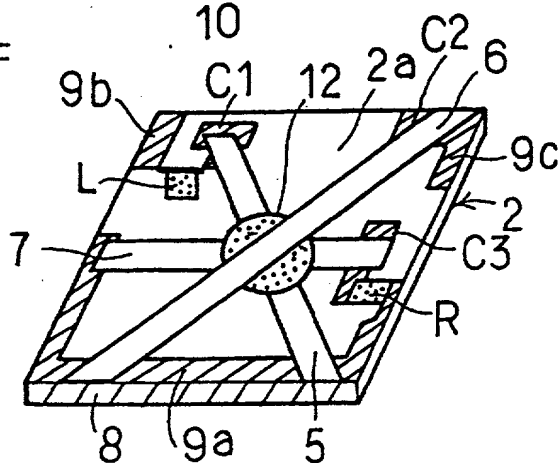





002290"68250960

~~図4~~ FIG. 4

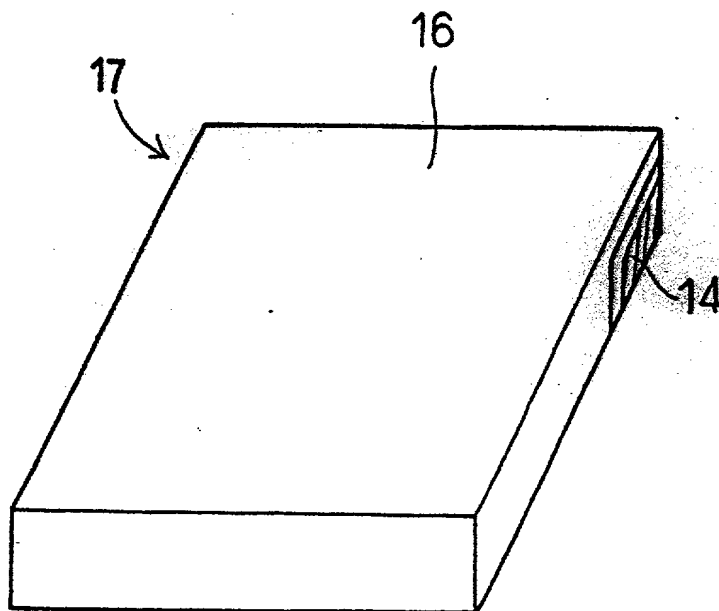

002290" 68450960

〔図5〕

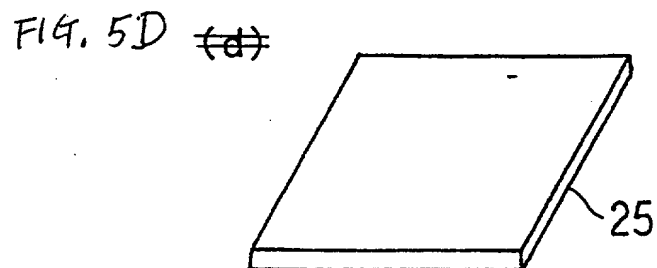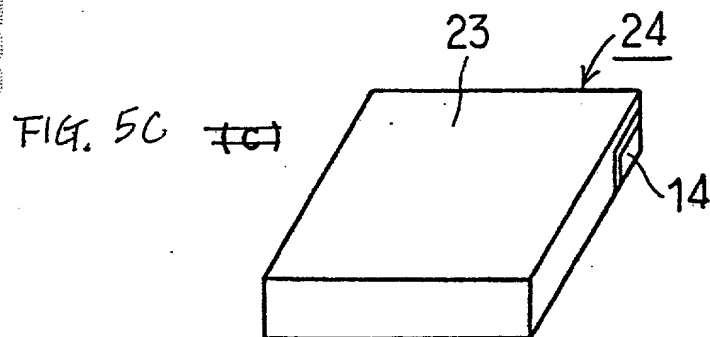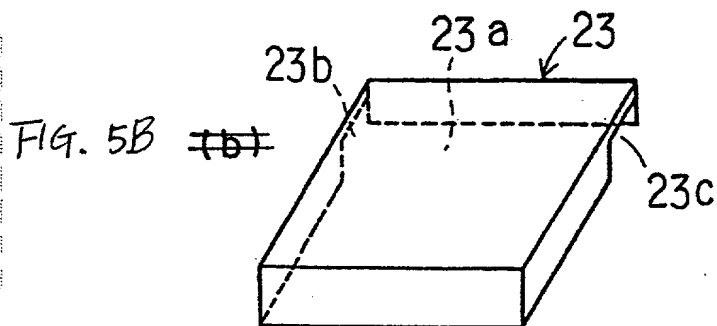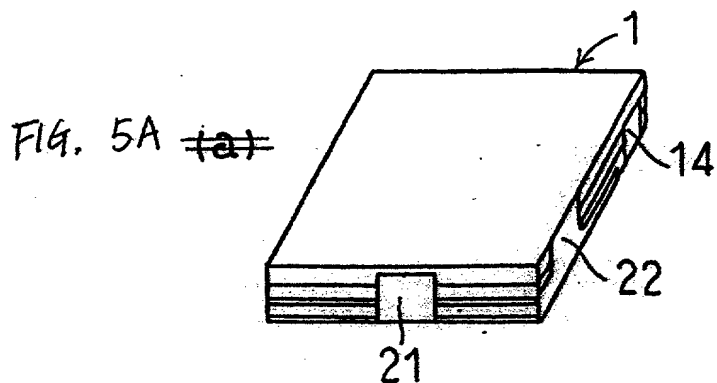

002290 68250960

図6

FIG. 6A (a)


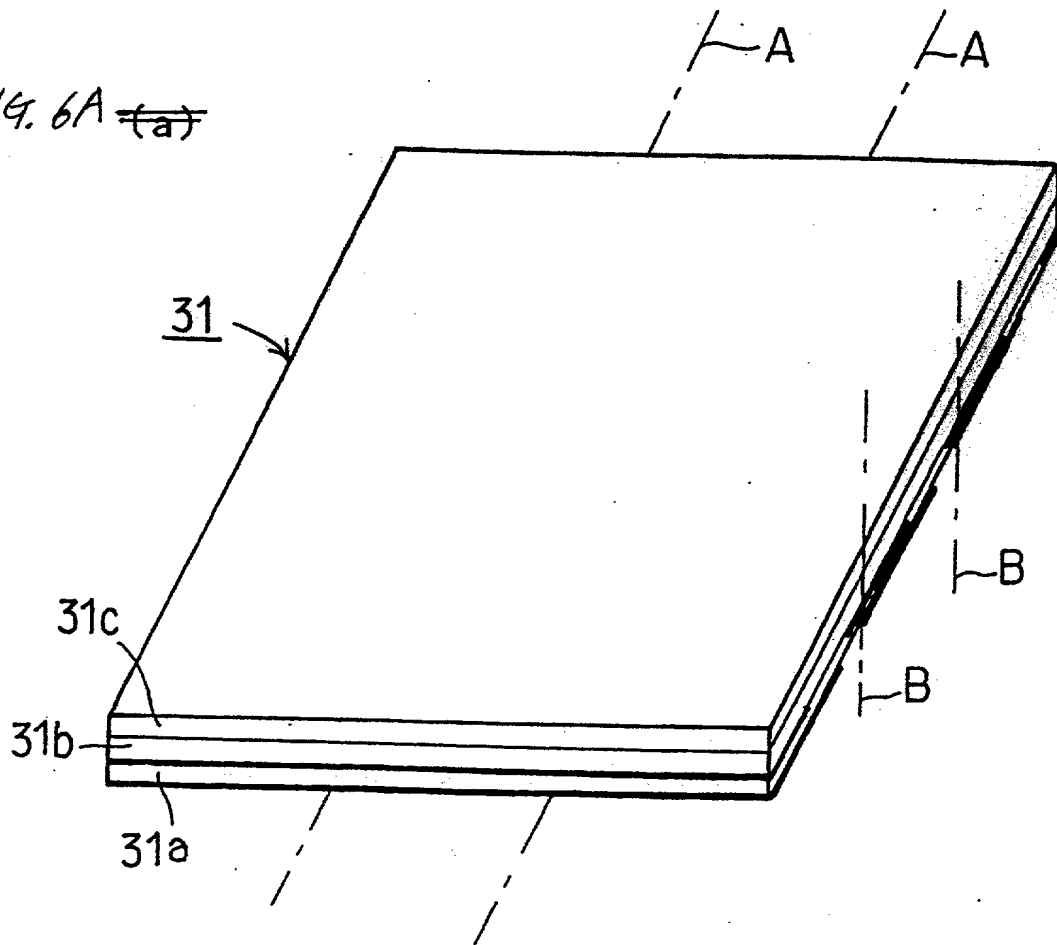



FIG. 6B (b)

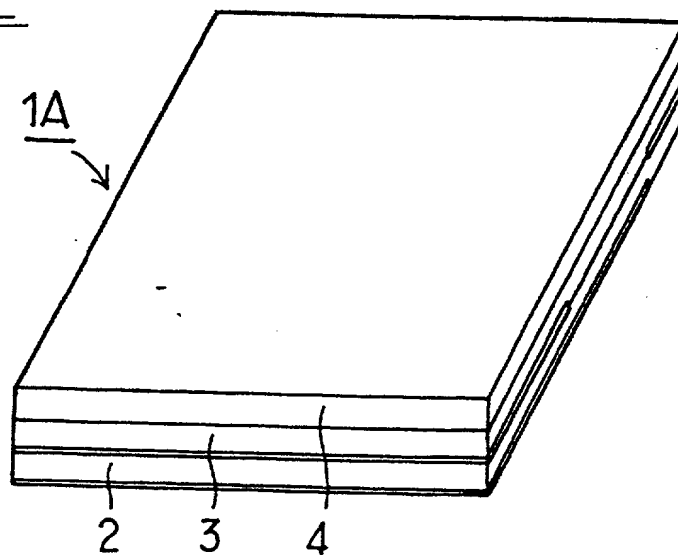

002290 68250960

【図7】


FIG. 7

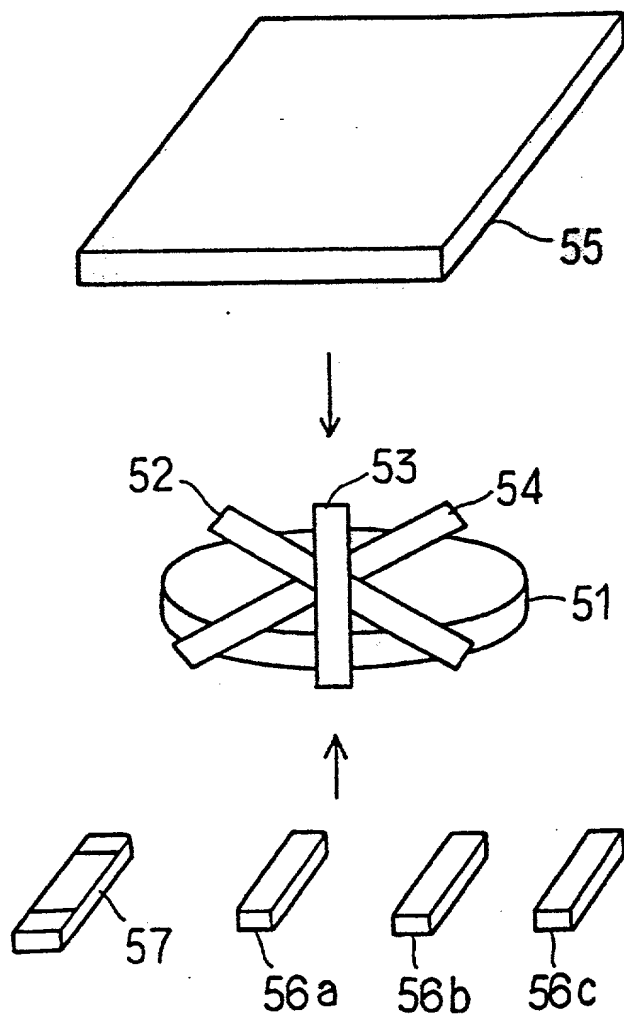

002290" 68250960

【図8】

FIG. 8

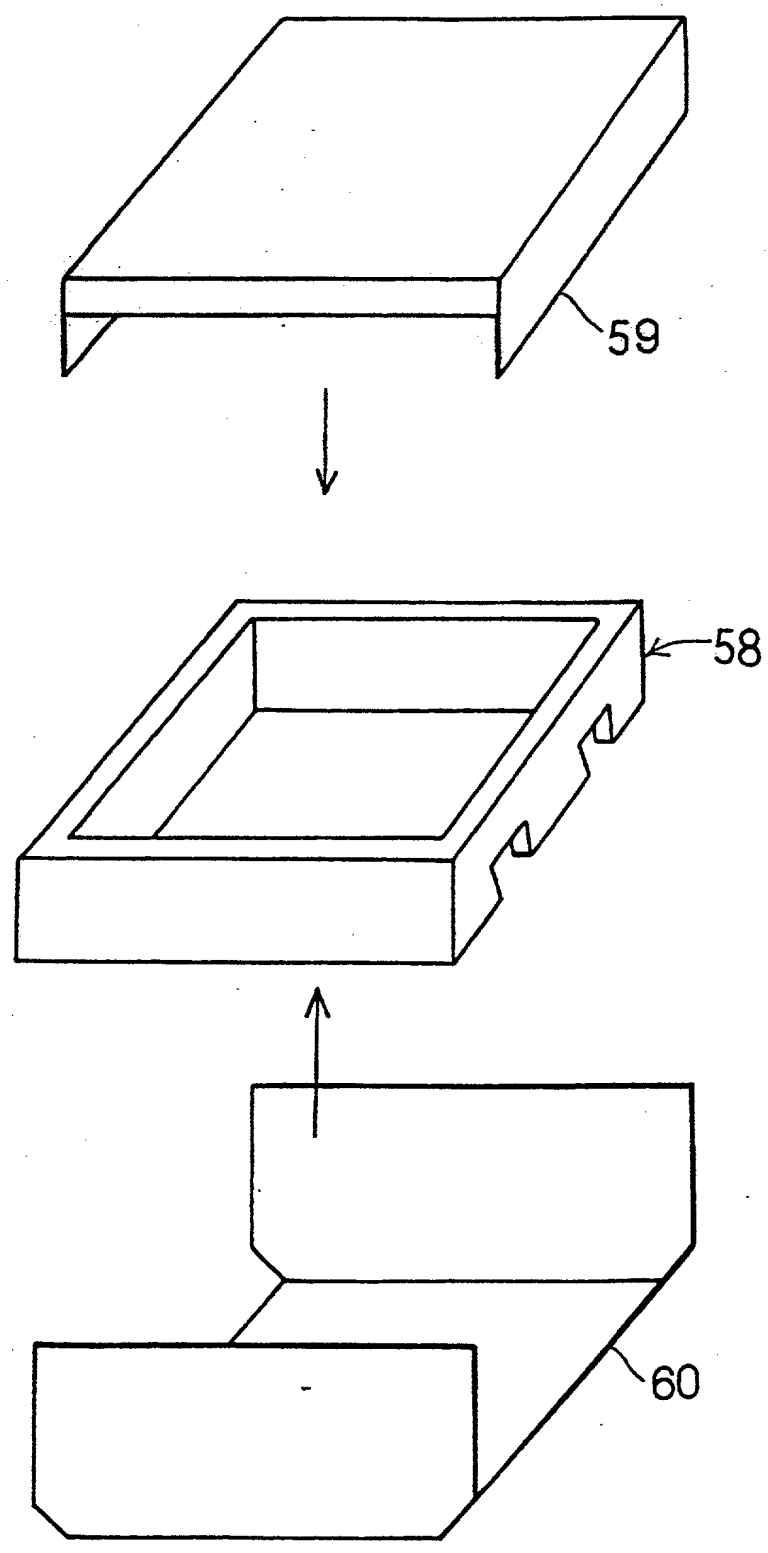

002290" 68250960

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**NONRECIPROCAL CIRCUIT DEVICE AND METHOD OF
FABRICATING THE SAME**

the specification of which is attached hereto, unless the following box is checked:

☐ was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign or Provisional Application(s)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	11-181906	28 June 1999	YES <u>X</u> NO ____
			YES ____ NO ____
			YES ____ NO ____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)

I hereby appoint customer no. 2352 OSTROLENK, FABER, GERB & SOFFEN, LLP, and the members of the firm, Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944; Louis C. Dujmich - Reg. No. 30,625 and Douglas A. Miro - Reg. No. 31,643, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent & Trademark Office connected therewith and to receive all correspondence.

SEND CORRESPONDENCE TO: **OSTROLENK, FABER, GERB & SOFFEN, LLP** DIRECT TELEPHONE CALLS TO:
1180 AVENUE OF THE AMERICAS (212) 382-0700
NEW YORK, NEW YORK 10036-8403
CUSTOMER NO. 2352

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Yasuhiro TANAKA	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City and either State or Foreign Country) Kanazawa-shi, Ishikawa-ken, Japan		COUNTRY OF CITIZENSHIP Japan
POST OFFICE ADDRESS c/o Murata Manufacturing Co., Ltd., Dept. A170, 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan		
FULL NAME OF SECOND JOINT INVENTOR (IF ANY)	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City and either State or Foreign Country)		COUNTRY OF CITIZENSHIP
POST OFFICE ADDRESS		
FULL NAME OF THIRD JOINT INVENTOR (IF ANY)	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City and either State or Foreign Country)		COUNTRY OF CITIZENSHIP
POST OFFICE ADDRESS		

☐ CONTINUED ON PAGE 2